

VIBRATING ROD POINT LEVEL SWITCH
JAYCEEVIBRO - 2020



SALIENT FEATURES:

*** Fast and Easy Installation**

No Calibration.

No effect of electrical properties of the Service material.

High Reliability.

Suitable for the highly dusty environment.

Suitable for grain size upto 20 mm

Field selectable operation logic.

Can be configured either for High or Low Level point switching.

*** Provides economical solutions.**

Various model not required.
Reduces the Inventory cost.

MEASURING SYSTEM:

The complete system, JAYCEEVIBRO -2020... series, consists of:-

The sensing probe of Vibrating Fork and The Electronic Switching unit

FUNCTION:

FUNCTION:

The electronically stimulated Concentric Rods vibrates at its mechanically resonance frequency of about 300 Hz when the Rod is free of the service material. The resonance is caused by the piezoelectric vibrator. One of the piezo crystals produces a small voltage which is transmitted to the switching amplifier. If the Rod is covered by the bulk material, a damping effect is produced and the piezo crystal does not produce the voltage and the amplifier will switch and a corresponding signal output is actuated. The vibration of the Rod has self-cleaning properties. The light deposit on the container wall does not affect the operation of the JAYCEEVIBRO

PRIMARY AREA OF APPLICATION

Building industry materials, cement, sand, lime, etc

Foodstuff industry, milk powder, flour, salt, foodgrains, etc

Plastic industry, powder, granular etc.

Timber industry, chemical and mining etc

TECHNICAL SPECIFICATIONS

(STANDARD):

SWITCHING UNIT:


Housing	: Aluminum, weather proof, powder coated. Integral with The probe/suitable for back panel mounting.
Cable entry	: 2 nos.
Ambient temperature	: 0 ° C to +60° C
Power consumption	: 2 VA
Mains Voltage	: 230/110 V AC (+/- 15%), 50 Hz, or 18 to 55 V DC (optional) Universal, 65 to 265 V AC
Output	: 2 sets of potential free c/o contacts rated at 5 amps, 230 V AC for non-inductive loads. OR PNP/ NPN DC output
Switching delay	: Continuously adjustable From 2 to 20 sec. probe Free or probe covered. (optional)
Safety operation	: Field selected switch over for min. or max. (FSL/FSH) switching points.

Switch status display : Green LED shows Normal, Red LED shows alarm.

FORK (SENSING PROBE):

Mounting	: Screwed – 1 1/2" BSP (standard) Or Flanged (optional)
Sense	: Rod, Stainless steel
Extension	: (Optional)
Length	: 230 (standard) upto 3000 mm and as per application.
Operating Temp in	: 150 deg for the integral switching vessel unit. (standard)

INSTALLATIONS:

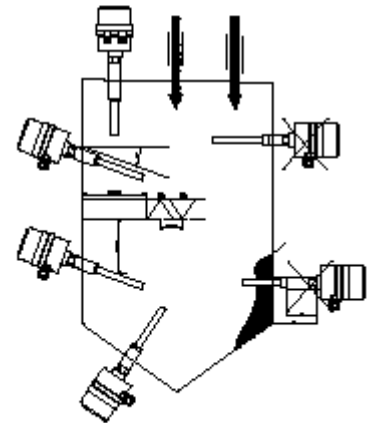

Continuous efforts for product development may necessitate changes in these details without notice

**For more information visit us at
www.jayceetech.com**



JAYCEE TECHNOLOGIES PVT. LTD.

Shed No.7, Nanekar Industries Building, Survey No. 79/2, Dangat Industrial Estate, Shivane, Pune - 411 023, India. ■ Tel. : 020 - 64703186 ■ Tel./Fax : 020 - 25290744

■ Email : Jayceetech@vsnl.net ■ Jayceetech@gmail.com