

Hydronix

Digital Microwave Sensors for
Organic Materials and Bulk Solids

Measuring Moisture and Brix in Organic Materials



GRAIN : FEED : NUTS : OILS : POWDERS : LIQUIDS

Hydronix Moisture Sensors

Digital microwave moisture sensors for organic materials

Hydronix offers a range of digital microwave moisture measurement sensors for use in the processing of solid or liquid organic materials. Our range offers a choice of installation and temperature options enabling a sensor to be positioned in many locations where moisture or Brix needs to be measured.

Hydronix sensors use our unique digital measurement technique which offers extreme precision and a wide moisture range. This technique also enables the user to select from a choice of measurement modes to ensure optimum performance in different materials and applications.

Hydro-Probe XT

For bins / silos / hoppers and conveyors, the Hydro-Probe XT is installed in the flow of material.




Hydro-Mix VII

For mixers and conveyors, this sensor is flush mounted and is easily installed in the floor of a mixer or the side of a screw conveyor.



Hydro-Probe Orbiter

This sensor can be installed in, or underneath, a bin / silo or hopper or on a belt conveyor when the temperature range is higher than the Hydro-Probe XT operating range.

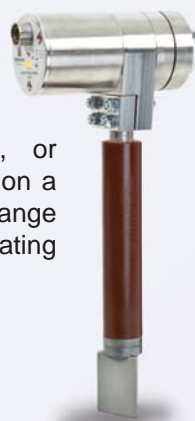

Hydro-Probe SE

A high temperature sensor for applications, the Hydro-Probe SE will measure Brix (50°Bx to 100°Bx) or moisture in liquids or flowing solids up to 100°C.



Features

- Choice of measurement modes for best results in different materials.
- Fast response to changing conditions with 25 measurements per second.
- Consistent performance with no need for recalibration except for use with different materials.
- Install into new or existing systems.
- Range of installation options to suit all systems.
- Not affected by dust or colour.
- Easy to install and maintain.
- Built to withstand harsh environments.
- Temperature stable.
- Worldwide service and support.


Display and Control Options

Hydronix has a range of display and control options



Installation Options

Hydronix sensors can be mounted in many different locations throughout the process provided that there is a consistent flow of material across the ceramic faceplate. Some typical locations are indicated below.

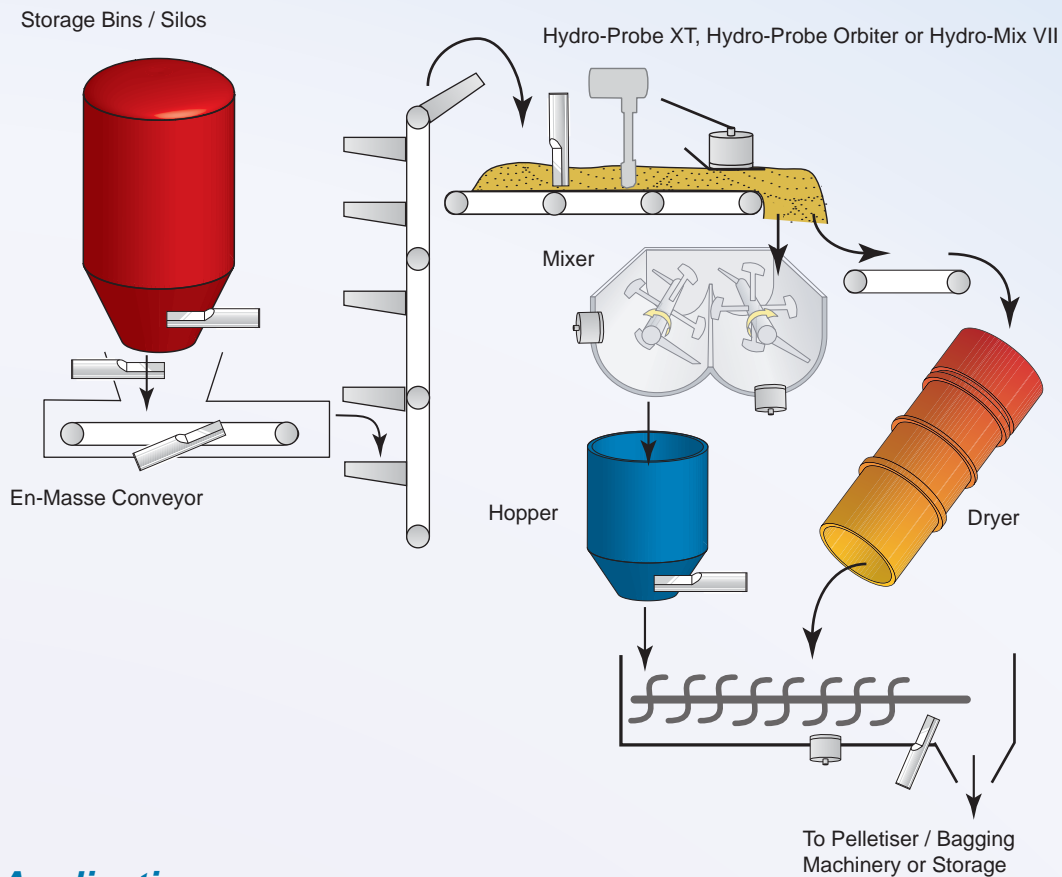

Typical Applications:

Hydronix sensors can be used across many applications that process organic materials. Typical examples include: Coffee Beans, Oils, Waste Solids, Seeds, Rice, Nuts, Animal Feed, Wood Pellets and many others.



Nuts

Measure moisture in many varieties of nuts and kernels during processing.



Coffee / Seeds / Pulses

Moisture can be measured in green coffee beans, seeds, beans and pulses.



Powdered Drinks

A sensor may be used in a calandria to measure the degree of dissolved solids in a liquid.



Oils

Moisture can be measured in many oils including vegetable, olive and engine oil.

Grain and Cereals

Control moisture during drying or the addition of mould inhibitors



Animal Feed

Control moisture during mixing and/or the pelletising process



Sensor Installation and Integration

Construction

Body: Stainless Steel.
Faceplate: Ceramic.

Fixing

Hydronix supplies a range of fixing accessories for mounting the sensors in a variety of different applications.

Measurement Range

The sensor will measure moisture up to the saturation point of material.

The Hydro-Probe SE will also measure between 50°Bx to 100°Bx.

Penetration of Field

Approximately 75-100mm dependant upon material.

Refresh Rate

25 times per second.

Analogue Outputs

Two configurable 4-20mA or 0-20mA current loop source available for moisture and temperature. May also be converted to 0-10V DC.

Digital Input/Outputs

2 configurable digital signals.

Digital (Serial) Communication

Opto-Isolated RS485 2-wire port, RS232 converter, Ethernet and USB interfaces available.

Programming details to access sensor values and parameters are available on request.

Operating Temperature

0-60°C.

High temperature options available up to 100°. The sensor will not measure ice.

Extension Cable

Six twisted pairs, 22AWG, 0.35mm² conductors. Screen braid with 65% minimum coverage plus aluminium/polyester foil. Maximum cable run of 100m.

Power Supply

+15V to +30V DC, 4W.

Integration Options

A combination of up to 16 Sensors can be connected on the RS485 network



Hydronix

Head Office - United Kingdom:

Tel: +44 (0)1483 468900
Fax: +44 (0)1483 468919

Email: enquiries@hydronix.com

Central Europe & Southern

Africa:


Tel: + 49 2563 4858

France:

Tel: + 33 652 04 89 04

Americas, Spain & Portugal:

Tel: 888-887-4884 (toll free)
or +1 231-439-5000

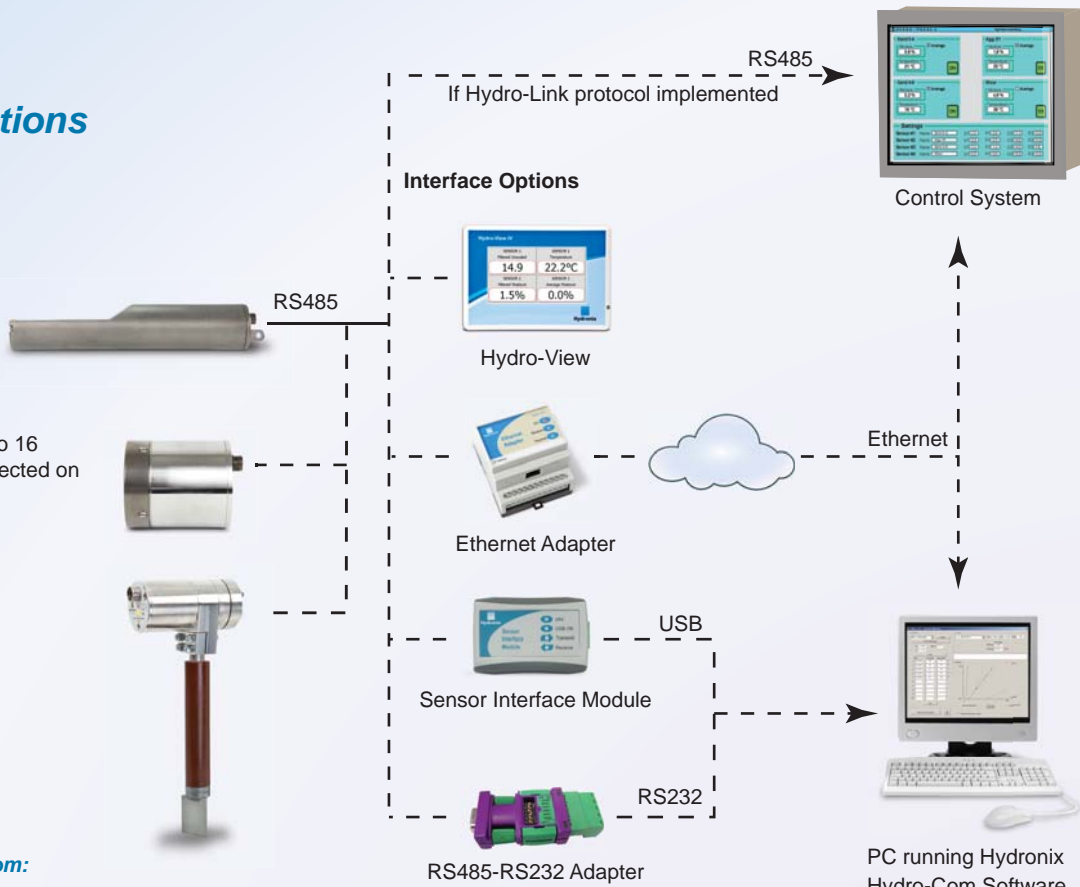

www.hydronix.com