



Vibrating Rod Point Level Switch (JAYCEEVIBRO 2200 SERIES)

PRINCIPAL

The electronically stimulated Concentric Rods vibrates at its mechanically resonance frequency of about 300 Hz when the Rod is free of the service material. The resonance is caused by the piezoelectric vibrator. One of the piezo crystals produces a small voltage which is transmitted to the switching amplifier. If the Rod is covered by the bulk material, a damping effect is produced, and the piezo crystal does not produce the voltage and the amplifier will switch, and a corresponding signal output is actuated. The vibration of the Rod has self-cleaning properties. The light deposit on the container wall does not affect the operation of the JAYCEEVIBRO.

Features

- Fast and Easy Installation
- No moving parts, no wear and tear, maintenance -free
- Fast switching response 1 sec
- No effect of electrical properties of the Service material.
- Suitable for the highly dusty environment.
- Low power consumption
- No Calibration required

Applications

- Building industry materials, cement, sand, lime, etc
- Foodstuff industry, milk powder, flour, salt, food grains, etc
- Plastic industry, powder, granular etc.
- Timber industry, chemical and mining etc

Parts

The parts of vibrating rod point level switch are explained in figure 1.

All dimensions are in millimeters.

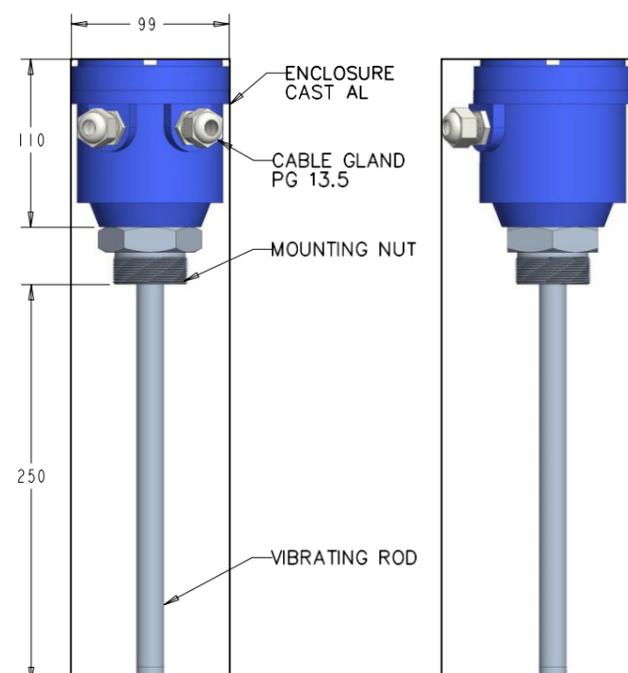


Figure 1 : Vibrating Rod Point level switch

JAYCEE TECHNOLOGIES PVT. LTD.

An ISO 9001-2008 C E Certified Company

Shed No. 7, Nanekar Industries Building, Survey No. 79/2, Dangat

Industrial Estate, Shivane, Pune - 411 023, India Contact No. :

07447401743

Email : jayceetech@gmail.com

Website : WWW.jayceetech.com



Technical Specification

Housing	: Aluminium, weather proof, powder coated.
Cable entry	: 2 nos.
Ambient temperature	: 0 ° C to +60° C
Power consumption	: 2 VA
Mains Voltage	: 230/110 V AC (+/-15%), 50 Hz, or 18 to 55 V DC (optional) Universal, 65 to 265 V AC
Output	: 2 sets of potential free c/o contacts rated at 5 amps, 230 V AC for noninductive loads. OR PNP/NPN DC output
Switching delay	: Continuously adjustable from 2 to 20 sec. probe
Safety operation	: Field selected switch over for min. or max. (FSL/FSH) switching
Switch status	: LED (Normal : Green, Alarm : Red)
ROD (SENSING PROBE):	
Mounting	: Screwed – 1" / 1 ½" BSP/NPT Flanged - As per requirement Others - As per requirement
Sense	: Rod, Stainless steel
Extension	: (Optional)
Length	: 250 (standard) up to 3000 mm and as per application.
Operating Temp	: 150 deg for the integral switching vessel unit. (standard)

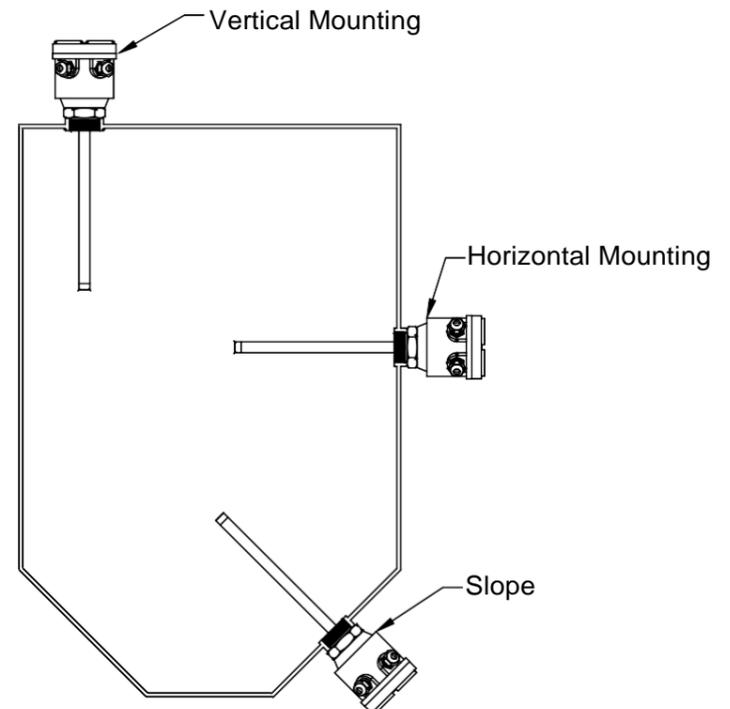


Figure 2 : Mounting Arrangement

Model Selection

JAYCEEVIBRO						
Enclosure (E)						
1 - Weatherproof IP-65 2 - Flameproof						
Temperature (T)						
1- Standard Temperature Up to 80°C						
Probe Length (PI)						
1- Standard Probe Length 250 mm 2- Extended Probe Length Up to 3000 mm						
Mounting Arrangement (M)						
1- Threaded BSP / NPT 2- Flanged ANSI/DIN ; 3 - Others						
Wetted Part (W)						
1-SS304 2-SS316 3-SS316L 4- PTFE Line 5- Others						
Output (O)						
1 - DPDT Relay Output 2 - Open Collector PNP/NPN						
VIBRO	E	T	PI	M	W	O
2200	1	1	2	1	2	1